

## Security Self Tapping Screw

**Head Style:** Countersunk Head


**Drive Type:** Post (Pin) Torx

**Class Grade:** A2-70 G304

**Material:** Stainless Steel

**Corrosion Protection Level:** Excellent

**Standard:** HEC Standard

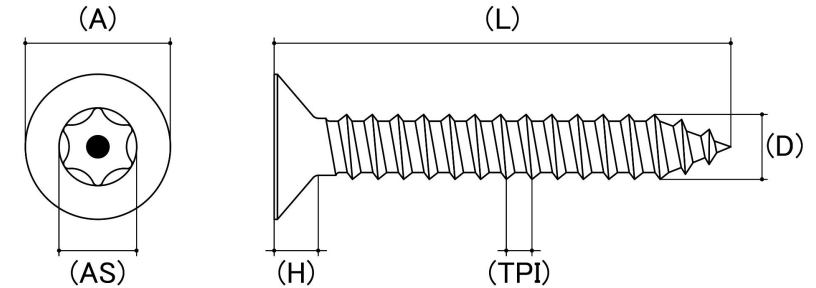

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (TPI)	Product Diameter (D) (mm)		Head Diameter (A) (mm)	Head Height (H) (mm)	Driver Bit Size (AS)	sku (qfind)
		Min	Max	Nom	Nom	Nom	
6g (3.50mm)	20	3.35	3.53	7.80	2.50	T10	03CPTS6
8g (4.20mm)	18	4.04	4.22	7.85	2.70	T15	03CPTS8
10g (4.80mm)	16	4.62	4.80	9.70	3.20	T20	03CPTS10
14g (6.30mm)	14	6.02	6.30	11.80	3.60	T30	03CPTS14

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024