

## Self Tapping Screw

**Head Style:** Pan Head

**Drive Type:** Phillips


**Class Grade:** Hardened Steel

**Finish:** Black Zinc

**Material:** Hardened Steel

**Corrosion Protection Level:** Moderate

**Standard:** AB ANSI B18.6.4

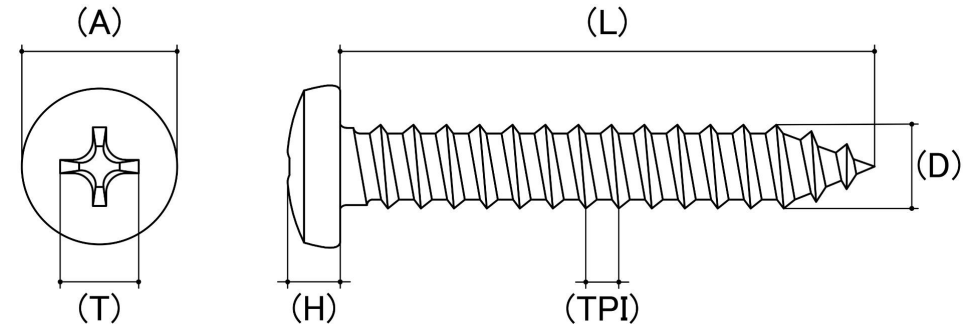

*Cad Drawings shown for graphic representation only.\**

Size	Thread Pitch (TPI)	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS)	sku (Part Number)
		Min	Max	Min	Max	Min	Max		
2g (2.20mm)	32 TPI	2.08	2.24	3.98	4.20	1.66	1.99	PH1	01P2BZ
4g (2.90mm)	24 TPI	2.74	2.90	5.21	5.57	1.76	2.11	PH1	01P4BZ
6g (3.50mm)	20 TPI	3.35	3.53	6.51	6.86	2.14	2.54	PH2	01P6BZ
8g (4.20mm)	18 TPI	4.04	4.22	7.78	8.18	2.67	2.93	PH2	01P8BZ
10g (4.80mm)	16 TPI	4.62	4.80	9.07	9.48	3.10	3.38	PH2	01P10BZ
12g (5.50mm)	14 TPI	5.28	5.46	10.34	10.80	3.54	3.84	PH3	01P12BZ
14g (6.30mm)	14 TPI	6.02	6.30	12.02	12.50	4.12	4.45	PH3	01P14BZ

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 09 Jul 2024