
Socket Allen Screw

Head Style: Button Head **Drive Type**: Internal Hex

Thread Type: UNC / BSW - Coarse Material: Alloy Steel Heat Treated Class Grade: High Tensile Grade 10.9

Finish: Plain Black Uncoated Corrosion Protection Level: Poor Standard: ANSI B 18.3 / ASTM F835

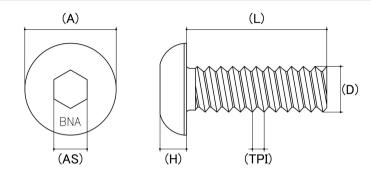

CAD drawings shown for graphic representation only.*

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS) (inches)	sku
			Min	Max	Min	Max	Min	Max	Nom	(qfind)
#2-56	56	Coarse	2.06	2.16	3.92	4.09	0.97	1.17	0	31BC256P
#4-40	40	Coarse	2.69	2.82	5.11	5.42	1.30	1.50	1/16	31BC440P
#5-40	40	Coarse	3.03	3.18	5.75	6.05	1.48	1.68	5/64	31BC540P
#6-32	32	Coarse	3.33	3.48	6.35	6.66	1.61	1.86	5/64	31BC632P
#8-32	32	Coarse	3.99	4.15	7.57	7.93	1.96	2.21	3/32	31BC832P
#10-24 (3/16")	24	Coarse	4.60	4.81	8.82	9.17	2.32	2.57	1/8	31BC1024F
1/4"	20	Coarse	6.15	6.33	10.65	11.10	3.10	3.36	5/32	31BC14P
5/16"	18	Coarse	7.78	7.93	13.39	13.90	3.87	4.22	3/16	31BC516P
3/8"	16	Coarse	9.38	9.53	16.16	16.67	4.70	5.06	7/32	31BC38P
1/2"	13	Coarse	12.53	12.70	21.62	22.23	6.23	6.74	5/16	31BC12P
isclaimer: imensional data and techni purces and not acquired thro here discrepancies are foun ales no warranties or repres	L cal information was obtained fo ough standard agencies. It has l d they are subject to change w	rom publically available been completed and compiled ithout notice. Bolt & Nut Austral cy and validity of the compiled	for reference purposes	only;	21.02	22.23	0.23	0.74	© Bolt & Nut Australia I	

Disclaimer:

* CAD drawings may not reflect diameter, thread length or overall length.