

## Socket Allen Screw

**Head Style:** Countersunk Head

**Drive Type:** Internal Hex

**Thread Type:** Metric - Coarse


**Material:** Alloy Steel Heat Treated

**Class Grade:** High Tensile Class 12.9

**Finish:** Plain Black Uncoated

**Corrosion Protection Level:** Poor

**Standard:** DIN 7991

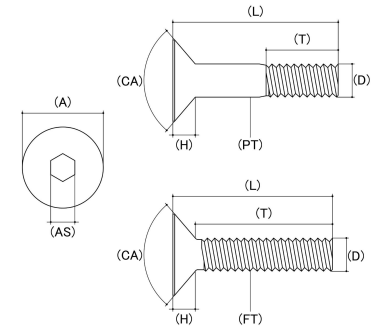

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)	Driver Bit Size (AS) (mm)	sku (qfind)
			Min	Max	Min	Max	Nom	Nom	
M2.5	0.45	Coarse	2.38	2.48	4.82	5.00	1.50	1	31C25P
M3	0.50	Coarse	2.87	2.98	5.54	6.00	1.86	2	31C3P
M4	0.70	Coarse	3.83	3.97	7.53	8.00	2.48	2	31C4P
M5	0.80	Coarse	4.82	5.00	9.43	10.00	3.10	3	31C5P
M6	1.00	Coarse	5.82	6.00	11.34	12.00	3.72	4	31C6P
M8	1.25	Coarse	7.78	8.00	15.24	16.00	4.96	5	31C8P
M10	1.50	Coarse	9.78	10.00	19.22	20.60	6.20	6	31C10P
M12	1.75	Coarse	11.73	12.00	23.12	24.00	7.44	8	31C12PM12

**Disclaimer:**

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2024