Socket Allen Screw

Head Style: Countersunk Head


Drive Type: Internal Hex

Thread Type: Metric - Coarse

Material: Stainless Steel Class Grade: A2-70 G304

Corrosion Protection Level: Excellent

Standard: DIN 7991 / ISO 10642

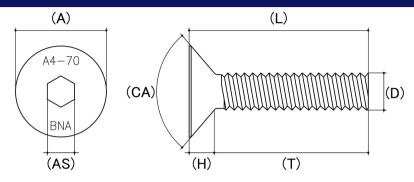

Cad Drawings shown for graphic representation only.*

| Size | Thread Pitch (mm) | Thread Type | Product Diameter (D) (mm) | | Head Diameter (A) (mm) | | Head Height (H) (mm) | Countersunk Angle | Driver Bit Size (AS) (mm) | sku (Part Number) |
|------|----------------------|-------------|------------------------------|-------|---------------------------|-------|-------------------------|-------------------|------------------------------|----------------------|
| | | | Min | Max | Min | Max | Nom | | (11411) | (Fait Nulliber) |
| M2 | 0.40mm | Coarse | 1.88 | 1.98 | 3.85 | 4.00 | 1.50 | 90° | 1 | 31CS2M |
| M2.5 | 0.45mm | Coarse | 2.38 | 2.48 | 4.82 | 5.00 | 1.86 | 90° | 1 | 31CS25M |
| M16 | 2.00mm | Coarse | 15.73 | 16.00 | 29.48 | 30.00 | 8.50 | 90° | 10 | 31CS16 |
| M16 | 2.00mm | Coarse | 15.73 | 16.00 | 29.48 | 30.00 | 8.50 | 90° | 10 | 31CS16M |

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

males no warranties of representations regarding the accuracy and various of the compiled milomation and da

Contact the relevant standard authorities for accurate and detailed information.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 29 Aug 2024

^{*} Cad Drawings may not reflect diameter, thread length or overall length.