

Socket Allen Screw

Head Style: Countersunk Head

Drive Type: Internal Hex


Thread Type: Metric - Coarse

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Standard: DIN 7991 / ISO 10642

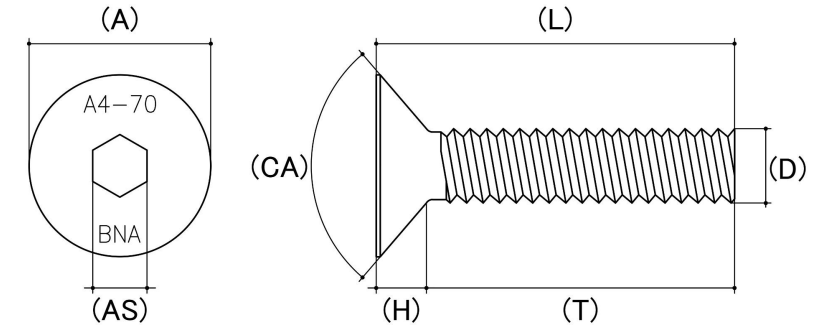

*CAD drawings shown for graphic representation only.**

| Size | Thread Pitch (mm) | Thread Type | Product Diameter (D) (mm) | | Head Diameter (A) (mm) | | Head Height (H) (mm) | Driver Bit Size (AS) (mm) | sku (qfind) |
|------|-------------------|-------------|---------------------------|-------|------------------------|-------|----------------------|---------------------------|-------------|
| | | | Min | Max | Min | Max | Nom | Nom | |
| M2 | 0.40 | Coarse | 1.88 | 1.98 | 3.85 | 4.00 | 1.50 | 1 | 31CS2M |
| M2.5 | 0.45 | Coarse | 2.38 | 2.48 | 4.82 | 5.00 | 1.86 | 1 | 31CS25M |
| M16 | 2.00 | Coarse | 15.73 | 16.00 | 29.48 | 30.00 | 8.50 | 10 | 31CS16M |

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2024