

Socket Allen Screw

Head Style: Cap Head

Drive Type: Internal Hex

Thread Type: Metric - Coarse


Material: Alloy Steel Heat Treated

Class Grade: High Tensile Class 12.9

Finish: Zinc Plated

Corrosion Protection Level: Moderate

Standard: DIN 912

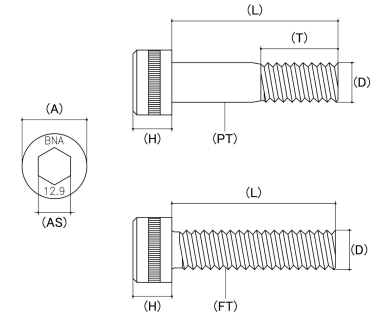

CAD drawings shown for graphic representation only.*

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS) (mm)	sku (qfind)
			Min	Max	Min	Max	Min	Max	Nom	
M2	0.40	Coarse	1.88	1.98	3.62	3.80	1.86	2.00	1	312
M2.5	0.45	Coarse	2.38	2.48	4.32	4.50	2.36	2.50	2	3125
M3	0.50	Coarse	2.87	2.98	5.32	5.50	2.86	3.00	2	313PT
M4	0.70	Coarse	3.83	3.97	6.78	7.00	3.82	4.00	3	314
M5	0.80	Coarse	4.82	5.00	8.28	8.50	4.82	5.00	4	315
M6	1.00	Coarse	5.82	6.00	9.78	10.00	5.70	6.00	5	316
M8	1.25	Coarse	7.78	8.00	12.73	13.00	7.64	8.00	6	318
M10	1.50	Coarse	9.78	10.00	15.73	16.00	9.64	10.00	8	3110
M12	1.75	Coarse	11.73	12.00	17.73	18.00	11.57	12.00	10	3112
M14	2.00	Coarse	13.73	14.00	20.67	21.00	13.57	14.00	12	3114
M16	2.00	Coarse	15.73	16.00	23.73	24.00	15.57	16.00	14	3116
M20	2.50	Coarse	19.67	20.00	29.53	30.00	19.73	20.00	17	3120
M24	3.00	Coarse	23.67	24.00	35.53	36.00	23.73	24.00	19	3124

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.