

## Socket Set (Grub) Screw

**Head Style:** No Head

**Drive Type:** Internal Hex

**Thread Type:** UNC / BSW - Coarse


**Material:** Alloy Steel Heat Treated

**Class Grade:** High Tensile Grade 14.9

**Finish:** Plain Black Uncoated

**Corrosion Protection Level:** Poor

**Standard:** ANSI B 18.3 / ASTM A574

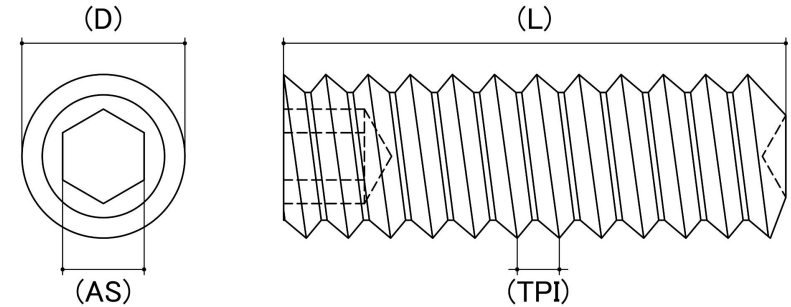

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Driver Bit Size (AS) (inches)	sku (qfind)
			Min	Max	Nom	
#2-56	56	Coarse	2.06	2.16	0	31SEC256P
#3-48	48	Coarse	2.37	2.49	0	31SEC348P
#4-40	48	Coarse	2.69	2.82	0	31SEC440P
#5-40	40	Coarse	3.03	3.18	1/16	31SEC540P
#6-32	32	Coarse	3.33	3.48	1/16	31SEC632P
#8-32	32	Coarse	3.99	4.15	5/64	31SEC832P
#10-24 (3/16")	24	Coarse	4.60	4.81	3/32	31SEC1024P
1/4"	20	Coarse	6.15	6.33	1/8	31SEC14P
5/16"	18	Coarse	7.78	7.93	5/32	31SEC516P
3/8"	16	Coarse	9.38	9.53	3/16	31SEC38P
7/16"	14	Coarse	10.93	11.13	7/32	31SEC716P

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.