

Allthread


Thread Type: UNC / BSW - Coarse

Thread Direction: Right Hand

Material Finish: Stainless G304

Corrosion Protection Level: Excellent

Standard: IFI 136C

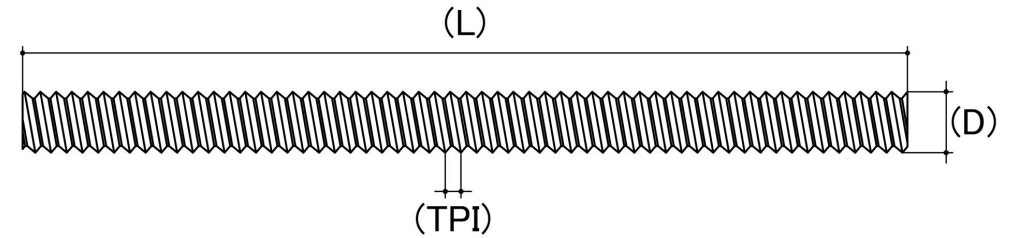

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Allthread Length (L) (mm)	Class Grade	sku (qfind)
			Min	Max	Nom		
1/4"	20	Coarse	6.15	6.33	914	A2-70 G304	54SC143
5/16"	18	Coarse	7.78	7.93	914	A2-70 G304	54SC5163
3/8"	16	Coarse	9.38	9.53	914	A2-70 G304	54SC383
7/16"	14	Coarse	10.93	11.13	914	A2-70 G304	54SC7163
1/2"	13	Coarse	12.53	12.70	914	A2-70 G304	54SC123
5/8"	11	Coarse	15.68	15.88	914	A2-70 G304	54SC583
3/4"	10	Coarse	18.83	19.05	914	A2-70 G304	54SC343
7/8"	9	Coarse	21.85	22.36	914	A2-70 G304	54SC783
1"	8	Coarse	25.15	25.40	914	A2-70 G304	54SC13

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024