

Machine Screw

Head Style: Countersunk Head

Drive Type: Slot

Thread Type: BA


Material: Carbon Steel

Class Grade: Low Tensile Class 4.6

Finish: Zinc Plated

Corrosion Protection Level: Moderate

Standard: AS B85

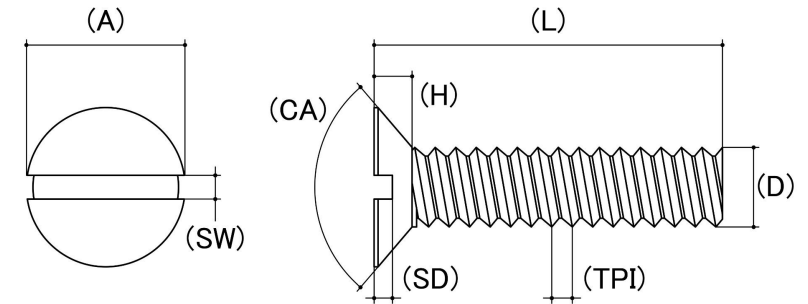

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Slot Width (SW) (mm)		Slot Depth (SD) (mm)	Driver Bit Size (AS)	sku (qfind)
			Min	Max	Min	Max	Min	Max	Min	Max	Nom	Nom	
6BA	0.53	BA	2.69	2.82	4.68	4.93	1.22	1.40	0.68	0.83	0.61	SL5	21CSL6BA
4BA	0.66	BA	3.48	3.63	6.15	6.41	1.50	1.81	0.86	1.01	0.79	SL5	21CSL4BA
2BA	0.81	BA	4.60	4.81	7.85	8.11	1.88	2.06	1.12	1.32	0.91	SL6	21CSL2BA

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2024