


Hollow Wall Anchor

Head Style: Pan Head

Material: Carbon Steel

Material Finish: Zinc Silver Plated

Corrosion Protection Level: Moderate

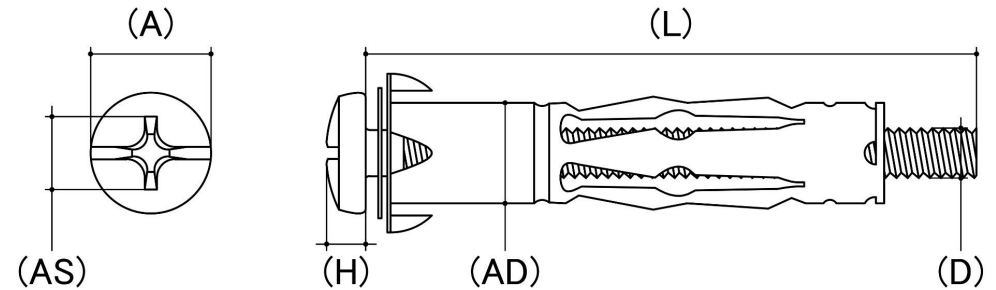

*CAD drawings shown for graphic representation only.**

Size	Thread Size x Pitch	Length (mm)	Anchor Length (L) (mm)	Head Diameter (A) (mm)		Wall Thickness (mm)	Min Base Material Thick (B) (mm)	Drill Hole Size (mm)	Drive Size (AS)	sku (qfind)
				Min	Max					
M4	M4 x 0.70p	30	30	7.70	8.30	4.00	0.00	8.00	PH2	65HWA404Z
M4	M4 x 0.70p	40	40	7.70	8.30	5.00	0.00	8.00	PH2	65HWA405
M4	M4 x 0.70p	40	40	7.70	8.30	11.00	3.00	8.00	PH2	65HWA4311
M4	M4 x 0.70p	41	41	7.70	8.30	9.00	4.00	8.00	PH2	65HWA449Z
M4	M4 x 0.70p	46	46	7.70	8.30	16.00	8.00	8.00	PH2	65HWA4816
M4	M4 x 0.70p	47	47	7.70	8.30	15.00	9.00	8.00	PH2	65HWA4915Z
M4	M4 x 0.70p	53	53	7.70	8.30	21.00	15.00	8.00	PH2	65HWA41521Z
M4	M4 x 0.70p	53	53	7.70	8.30	23.00	16.00	8.00	PH2	65HWA41623
M4	M4 x 0.70p	67	67	7.70	8.30	38.00	30.00	8.00	PH2	65HWA43038Z
M5	M5 x 0.80p	46	46	9.10	9.60	13.00	5.00	10.00	PH2	65HWA5513Z
M5	M5 x 0.80p	59	59	9.10	9.60	17.00	5.00	10.00	PH2	65HWA5517Z
M6	M6 x 1.00p	46	46	11.40	11.90	13.00	4.00	11.00	PH2	65HWA6413Z
M6	M6 x 1.00p	58	58	11.40	11.90	16.00	3.00	11.00	PH2	65HWA6316
M6	M6 x 1.00p	59	59	11.40	11.90	18.00	5.00	11.00	PH2	65HWA6518Z

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.