

Tie Down Coupler Screw Anchor

Head Style: Tie Wire


Material: Carbon Steel

Class Grade: Low Tensile Class 5.8

Material Finish: Zinc Yellow Plated

Corrosion Protection Level: Moderate

Internal External: Internal

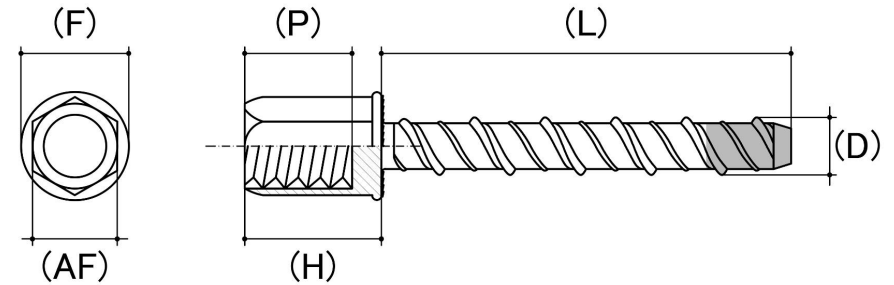

*Cad Drawings shown for graphic representation only.**

Size	Thread Size x Pitch	Length (L) (mm)	Flange Diameter (F) (mm)	Head Diameter (A) (mm)	Head Height (H) (mm)	Internal Nut Depth (mm)	Min Hole Dia (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (Part Number)
M12	M12 x 1.75p	100	24	24.50	30.00	23	15	55	60	45	12	19mm	65SBCO12100
M12	M12 x 1.75p	150	24	24.50	30.00	23	15	55	60	95	12	19mm	65SBCO12150

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 05 Aug 2024