

Thin Lock Nut

Thread Type: UNC / BSW - Coarse


Thread Direction: Right Hand

Material: Stainless Steel

Class Grade: A2-70 G304

Corrosion Protection Level: Excellent

Standard: ANSI B18.2.2

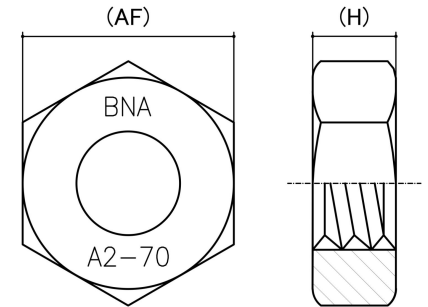

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Thread Type	Overall Nut Height (B) (mm)		Across Flats (AF) (mm)		Spanner Size (AF) (inches)	sku (qfind)
			Min	Max	Min	Max		
#12-24	24	Coarse	3.76	4.09	10.88	11.16	7/16	41SC1224
1/4"	20	Coarse	3.81	4.15	10.88	11.16	7/16	41LSC14
5/16"	18	Coarse	4.57	5.08	12.43	12.76	1/2	41LSC516
3/8"	16	Coarse	5.34	5.77	14.00	14.28	9/16	41LSC38
1/2"	13	Coarse	7.68	8.21	18.70	19.05	3/4	41LSC12
5/8"	11	Coarse	9.23	9.83	23.42	23.83	15/16	41LSC58
3/4"	10	Coarse	10.11	11.33	27.64	28.58	1-1/8	41LSC34
7/8"	9	Coarse	11.64	12.96	32.24	33.33	1-5/16	41LSC78
1"	8	Coarse	13.19	14.61	36.83	38.16	1-1/2	41LSC1

Disclaimer:

Dimensional data and technical information was obtained from publicly available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024