


## Wave Tooth Spring Pin

**Material:** Stainless Steel

**Class Grade:** G420

**Corrosion Protection Level:** Very Good

**Standard:** JIS B 2808:1999

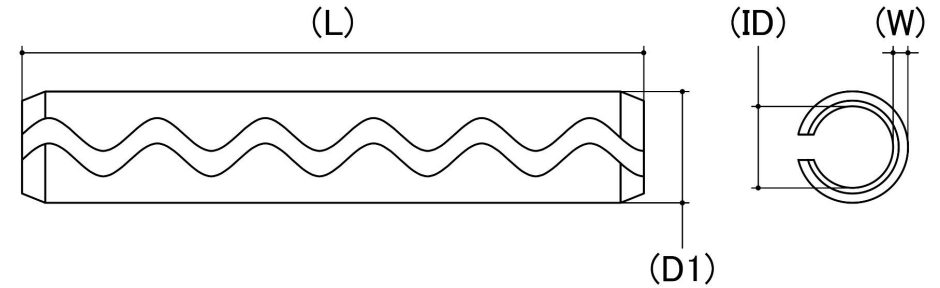

*CAD drawings shown for graphic representation only.\**

Size	Pin Diameter (D) (mm)		Inside Dia. (ID) (mm)	Wall Thickness (W) (mm)	Double Shear Load (KN)	Hole Size To Suit (mm)	sku (qfind)
	Min	Max	Nom	Nom	Nom	Nom	
M2	2.15	2.25	1.30	0.40	2.760	2.00	37SPWS2
M2.5	2.65	2.75	1.70	0.50	4.310	2.50	37SPWS25
M3	3.15	3.25	2.00	0.60	6.200	3.00	37SPWS3
M4	4.20	4.40	2.50	0.80	10.800	4.00	37SPWS4
M5	5.20	5.40	3.20	1.00	17.250	5.00	37SPWS5
M6	6.20	6.40	3.80	1.20	24.830	6.00	37SPWS6
M8	8.30	8.60	4.70	1.60	44.130	8.00	37SPWS8
M10	10.30	10.60	6.00	2.00	68.940	10.00	37SPWS10

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only, where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024