

## Peeled Pop Blind Rivet


**Head Style:** Large Flange Head

**Shell Material:** Aluminium

**Stem Material:** Steel Zinc Plated

**Corrosion Protection Level:** Moderate

**Comments:** Max Grip = The maximum thickness of material it will grip

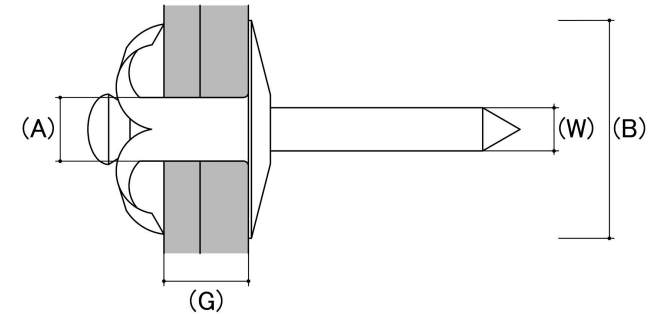

*CAD drawings shown for graphic representation only.\**

Industry Rivet Code	Rivet Diameter (A) (mm)	Head Diameter (B) (mm)	Shell Length (L) (mm)	Max Grip (G) (mm)	Stem Diameter (W) (mm)		Hole Size (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Min	Max	Nom	
73 ASPL 6-4	4.80 (3/16)	13.80	12.00	7.00	2.50	2.90	4.90	73ASPL64
73 ASPL 6-6	4.80 (3/16)	13.80	14.00	9.00	2.50	2.90	4.90	73ASPL66
73 ASPL 6-8	4.80 (3/16)	13.80	18.00	12.00	2.50	2.90	4.90	73ASPL68
73 ASPL 6-10	4.80 (3/16)	13.80	20.00	14.00	2.50	2.90	4.90	73ASPL610
73 ASPL 6-12	4.80 (3/16)	13.80	25.00	19.00	2.50	2.90	4.90	73ASPL612

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 26 Mar 2024