

## Hand Tap


**Product Type:** Bottoming Tap

**Thread Type:** UNC / BSW - Coarse

**Material:** High Speed Steel

**Standard:** ISO529

**Brand:** Alpha

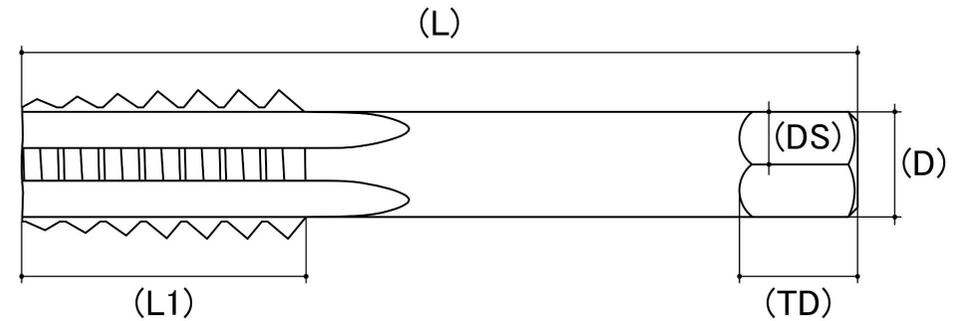

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (TPI)	Thread Type	Length (L) (mm)	Drive Square (DS) (mm)	Tapping Drill Size (mm)	sku (qfind)
			Nom	Nom	Nom	
1/8"	40	Coarse	48	2	2	14W18BA
5/32"	32	Coarse	53	3	3	14W532BA
3/16"	24	Coarse	58	4	3	14W316BA
1/4"	20	Coarse	66	4	5	14W14BA
5/16"	18	Coarse	72	4	6	14W516BA
3/8"	16	Coarse	80	5	7	14W38BA
7/16"	14	Coarse	85	6	9	14W716BA
1/2"	12	Coarse	89	7	10	14W12BA
9/16"	12	Coarse	95	9	12	14W916BA
5/8"	11	Coarse	102	9	13	14W58BA

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024