

## Chemical Anchor Stud

**Head Style:** Hex Head


**Material:** Stainless Steel

**Class Grade:** A4-70 G316

**Material Finish:** Stainless Steel

**Corrosion Protection Level:** Ultimate

**Internal External:** External

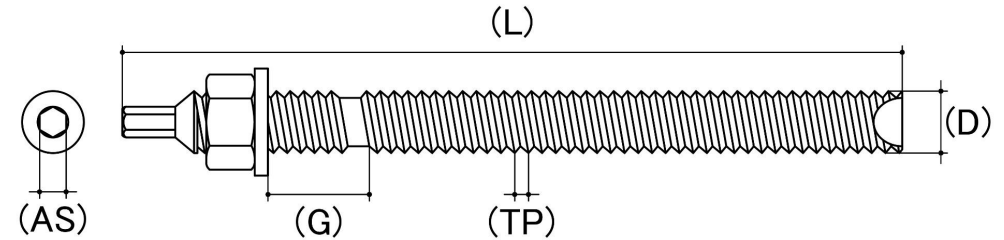

*Cad Drawings shown for graphic representation only.\**

Size	Thread Size x Pitch	Length (L) (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Min Material Thick (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Drive Size (AS) (mm)	sku (Part Number)
M8	M8 x 1.25p	110	80	40	110	14	10	13	65CAS8110CPM
M10	M10 x 1.50p	130	90	45	120	23	12	16	65CAS10130CPM
M12	M12 x 1.75p	160	110	55	140	27	14	18	65CAS12160CPM
M16	M16 x 2.00p	190	125	65	160	35	18	24	65CAS16190CPM
M20	M20 x 2.50p	260	170	85	220	55	22	30	65CAS20260CPM
M24	M24 x 3.00p	300	210	105	280	50	26	36	65CAS24300CPM

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 05 Aug 2024