

Countersunk Coach Screw

Thread Type: Metric - Coarse

Thread Direction: Right Hand


Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Standard: HEC

Comments: Thread length will be at least 60% or more for the length of screw chosen

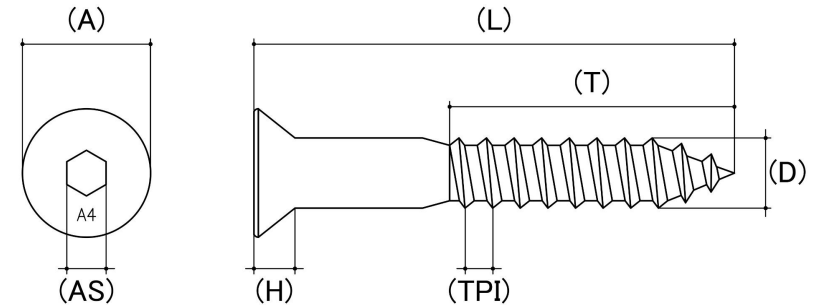

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (as) (mm)	sku (Part Number)
			Min	Max	Min	Max	Min	Max	Nom	
M8	3.60mm	Coarse	7.42	8.58	15.90	16.25	4.75	4.85	5.00	57CS8M
M10	4.50mm	Coarse	9.42	10.58	19.25	20.00	6.20	6.30	6.00	57CS10M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Jul 2024