

Thread Rolling Self Tapping Screw

Head Style: Pan Head

Drive Type: Pozi


Class Grade: Hardened Steel

Finish: Waxed & Zinc Plated

Material: Hardened Steel

Corrosion Protection Level: Moderate

Standard: DIN 7500

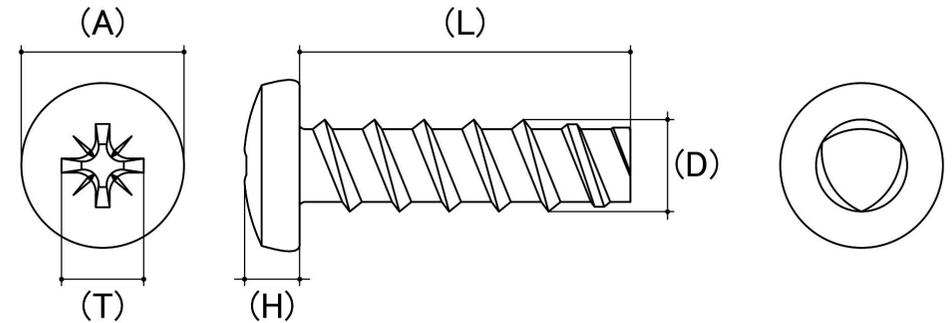

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Pilot Hole Sizes	Driver Bit Size (AS)	sku (qfind)
		Min	Max	Min	Max	Min	Max	Nom	Nom	
M2.5	15	2.48	2.58	4.70	5.00	1.88	2.12	Refer to the CAD Drawing	PZ1	04PP25HP
M3	14	2.96	3.09	5.70	6.00	2.28	2.52	Refer to the CAD Drawing	PZ1	04PP3HP
M4	13	3.98	4.10	7.64	8.00	2.95	3.25	Refer to the CAD Drawing	PZ2	04PP4HP
M5	12	4.98	5.11	9.64	10.00	3.65	3.95	Refer to the CAD Drawing	PZ2	04PP5HP
M6	11	5.97	6.12	11.57	12.00	4.45	4.75	Refer to the CAD Drawing	PZ3	04PP6HP

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024