

## Machine Screw

**Head Style:** Cheese Head

**Drive Type:** Slot


**Thread Type:** Metric - Coarse

**Material:** Nylon

**Finish:** White

**Corrosion Protection Level:** Excellent

**Standard:** DIN 84

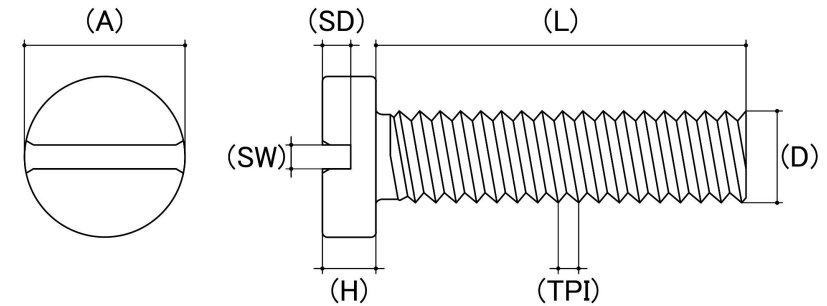

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Slot Width (SW) (mm)	Driver Bit Size (AS)	sku (qfind)
			Min	Max	Min	Max	Min	Max	Nom	Nom	
M2.5	0.45	Coarse	2.38	2.48	4.32	5.00	1.46	1.60	0.60	SL4	21CHSLNY25
M3	0.50	Coarse	2.87	2.98	5.32	5.50	1.86	2.00	1.20	SL5	21CHSLNY3
M4	0.70	Coarse	3.83	3.97	6.78	7.00	2.46	2.60	1.20	SL8	21CHSLNY4
M5	0.80	Coarse	4.82	5.00	8.28	8.50	3.12	3.30	1.20	SL8	21CHSLNY5
M6	1.00	Coarse	5.82	6.00	9.78	10.00	3.60	3.90	1.60	SL10	21CHSLNY6
M8	1.25	Coarse	7.78	8.00	12.73	13.00	4.70	5.00	2.00	SL10	21CHSLNY8

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data.

Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2024