

Machine Screw

Head Style: Countersunk Head

Drive Type: Phillips


Thread Type: BSW - Coarse

Material: Stainless Steel

Class Grade: A4-70 G316

Corrosion Protection Level: Ultimate

Standard: ASNI B18.6.3

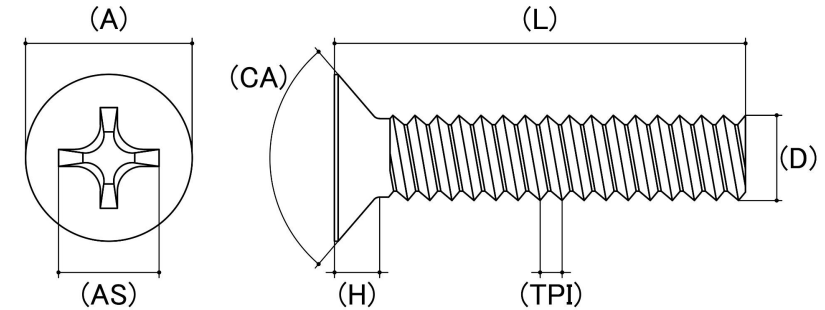

*Cad Drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Countersunk Angle		Driver Bit Size (AS)	sku (Part Number)
			Min	Max	Min	Max	Min	Max	Min	Max		
1/8"	40 TPI	Coarse	2.95	3.20	5.11	5.57	1.40	1.71	80-82°	-	PH2	21CSW18M
5/32"	32 TPI	Coarse	3.95	4.10	6.46	6.94	1.78	2.04	80-82°	-	PH2	21CSW532M
3/16" (#10-24)	24 TPI	Coarse	4.60	4.81	7.80	8.34	2.14	2.54	80-82°	-	PH2	21CSW316M
1/4"	20 TPI	Coarse	6.15	6.33	10.47	11.13	2.85	3.36	80-82°	-	PH3	21CSW14M
5/16"	18 TPI	Coarse	7.78	7.93	13.16	13.90	3.38	3.81	80-82°	-	PH4	21CSW516M

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 29 Aug 2024