


## Eye Bolt Collar Kit

**Material:** Stainless Steel

**Class Grade:** A4-70 G316

**Corrosion Protection Level:** Ultimate

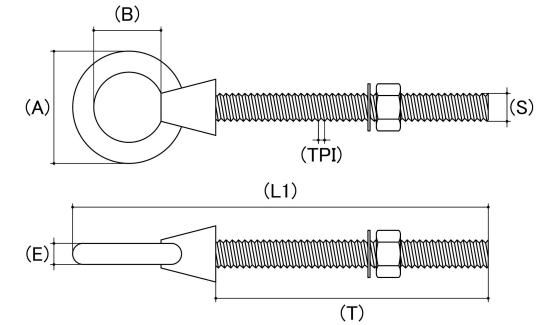

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (mm)	Thread Type	Length L (1) (mm)		Thread Length (T) (mm)		Inside dia. of Eye (B) (mm)		Width (A) (mm)		Thickness Of Eye (E) (mm)		Breaking Load	sku (qfind)
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Nom	
M6	1.00	Coarse	91.00	96.00	59.50	60.50	16.00	17.00	25.50	26.50	4.70	5.20	-	61CEBS660M
M8	1.25	Coarse	117.00	122.00	79.50	80.50	20.00	21.00	31.50	32.50	5.70	6.20	-	61CEBS880M
M10	1.50	Coarse	146.00	151.00	99.50	100.50	25.00	26.00	40.00	41.50	7.30	8.00	2600	61CEBS10100M
M10	1.50	Coarse	166.00	171.00	119.00	121.00	25.00	26.00	40.00	41.50	7.30	8.00	2600	61CEBS10120M
M12	1.75	Coarse	178.00	183.00	119.00	121.00	30.00	31.00	48.00	50.00	9.30	10.00	3500	61CEBS12120M

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024