


## Eye Eye Turnbuckle

**Material:** Stainless Steel

**Class Grade:** A4-70 G316

**Corrosion Protection Level:** Ultimate

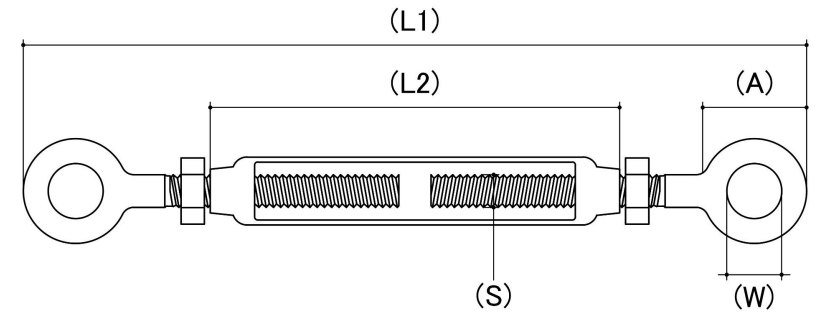

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (mm)	Thread Type	Length L (1) (mm)	Length L (2) (mm)	Length Unwound (mm)	Inside Eye Width (W) (mm)	Outside Diameter Of Eye (A) (mm)	Breaking Load	sku (qfind)
			Nom	Nom	Nom	Nom	Nom	Nom	
M4	0.70	Coarse	98.00	55.00	148.00	8.00	15.00	475	62TBSEE455M
M5	0.80	Coarse	120.00	70.00	175.00	8.00	18.00	680	62TBSEE570M
M6	1.00	Coarse	160.00	90.00	223.00	10.00	22.00	1500	62TBSEE690M
M8	1.25	Coarse	200.00	120.00	295.00	14.00	27.00	2300	62TBSEE8120M
M10	1.50	Coarse	240.00	150.00	358.00	16.00	33.00	3100	62TBSEE10150M
M12	1.75	Coarse	300.00	200.00	463.00	17.00	38.00	4400	62TBSEE12200M
M16	2.00	Coarse	390.00	250.00	575.00	26.00	54.00	8000	62TBSEE16250M
M20	2.50	Coarse	510.00	300.00	727.00	28.00	63.00	11000	62TBSEE20300M

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024