


## Jaw Swage Rigging Screw

**Material:** Stainless Steel

**Class Grade:** A4-70 G316

**Corrosion Protection Level:** Ultimate

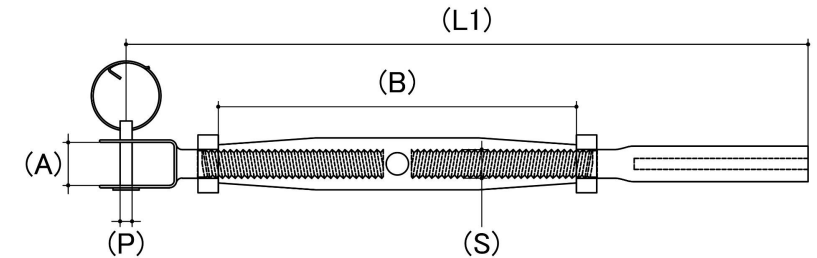

*CAD drawings shown for graphic representation only.\**

Size	Thread Pitch (mm)	Thread Type	Length L (1) (mm)	Wire Size (mm)	Body Length (mm)	Jaw Width (mm)	Pin Diameter (P) (mm)	Breaking Load	sku (qfind)
			Nom	Nom	Nom	Nom	Nom	Nom	
M5	0.80	Coarse	155.00	2.50	80.00	7.00	4.80	600	62RSSJS515525M
M5	0.80	Coarse	155.00	3.20	80.00	8.20	4.80	750	62RSSJS515532M
M6	1.00	Coarse	175.00	3.20	95.00	8.20	5.80	1000	62RSSJS617532M
M6	1.00	Coarse	175.00	4.00	95.00	9.20	5.80	1000	62RSSJS61754M
M8	1.25	Coarse	205.00	5.00	105.00	11.00	7.80	1100	62RSSJS82055M
M10	1.50	Coarse	230.00	5.00	125.00	15.00	8.90	2200	62RSSJS102305M
M10	1.50	Coarse	230.00	6.00	125.00	15.00	8.90	2200	62RSSJS102306M

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024