

Drop-In Anchor

Head Style: Countersunk Head

Body Type: Smooth


Material: Carbon Steel

Class Grade: Low Tensile Class 4.6

Material Finish: Zinc Yellow Plated

Corrosion Protection Level: Moderate

Internal External: Internal

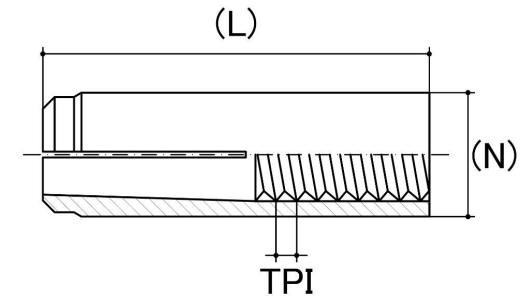

*Cad Drawings shown for graphic representation only.**

Size	Thread Size x Pitch	Length (L) (mm)	Body Diameter (N) (mm)	Minimum Spacing (mm)	Min Material Thick (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	sku (Part Number)
M6	M6 x 1.00p	25	8.00	55	100	10	8	65DI625
M8	M8 x 1.25p	30	10.00	60	100	12	10	65DI830
M10	M10 x 1.50p	40	12.00	100	120	15	12	65DI1040
M12	M12 x 1.75p	50	15.00	120	130	20	15	65DI1250
M16	M16 x 2.00p	65	20.00	150	160	25	20	65DI1665
M20	M20 x 2.50p	80	25.00	160	200	30	25	65DI2080

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 05 Aug 2024