

## Screw Anchor / Screw Bolt / XBolt


**Head Style:** Hex Flange Head

**Material:** Carbon Steel

**Class Grade:** Low Tensile Class 5.8

**Material Finish:** Galvanised

**Corrosion Protection Level:** Excellent

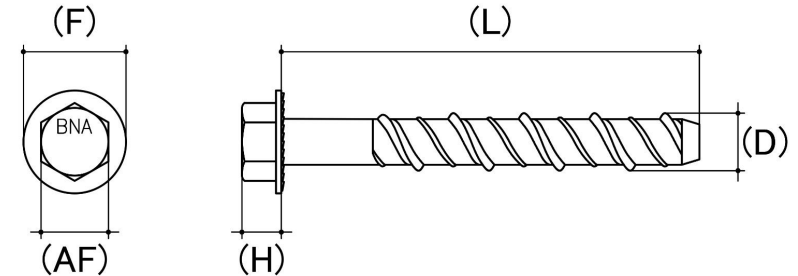

*CAD drawings shown for graphic representation only.\**

Size	Length (mm)	Anchor Length (L) (mm)	Thread Length (T) (mm)	Flange Diameter (F) (mm)	Head Height (H) (mm)		Min Hole Dia On Fixture (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Min	Max	Nom	Nom	Nom	Nom	Nom		
M6	30	30	Full Thread	13.70	6.20	6.30	8	25.00	40	5.00	6.00	10	65SB630G
M6	50	50	Full Thread	13.70	6.10	6.30	8	25.00	40	25.00	6.00	10	65SB650G
M6	75	75	Full Thread	13.70	6.10	6.30	8	25.00	40	50.00	6.00	10	65SB675G
M6	100	100	Full Thread	13.70	6.10	6.30	8	25.00	40	75.00	6.00	10	65SB6100G
M8	50	50	Full Thread	17.90	8.00	8.20	11	40.00	40	10.00	8.00	13	65SB850G
M8	60	60	Full Thread	17.90	8.00	8.20	11	40.00	40	20.00	8.00	13	65SB860G
M8	75	75	Full Thread	17.90	8.00	8.20	11	40.00	40	35.00	8.00	13	65SB875G
M8	100	100	Full Thread	17.90	8.00	8.20	11	40.00	40	60.00	8.00	13	65SB8100G
M10	60	60	Full Thread	22.50	9.30	9.50	13	50.00	50	10.00	10.00	15	65SB1060G
M10	75	75	Full Thread	22.50	9.30	9.50	13	50.00	50	25.00	10.00	15	65SB1075G
M10	100	100	Full Thread	22.50	9.30	9.50	13	50.00	50	50.00	10.00	15	65SB10100G
M10	120	120	95	22.50	9.30	9.50	13	50.00	50	70.00	10.00	15	65SB10120G
M10	150	150	100	22.50	9.30	9.50	13	50.00	50	100.00	10.00	15	65SB10150G
M12	75	75	Full Thread	26.10	11.20	11.40	15	55.00	60	20.00	12.00	16	65SB1275G
M12	100	100	Full Thread	26.10	11.20	11.40	15	55.00	60	45.00	12.00	16	65SB12100G

Size	Length (mm)	Anchor Length (L) (mm)	Thread Length (T) (mm)	Flange Diameter (F) (mm)	Head Height (H) (mm)		Min Hole Dia On Fixture (mm)	Embedment Depth (mm)	Minimum Spacing (mm)	Max Fast Thickness (G) (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Min	Max	Nom	Nom	Nom	Nom	Nom		
M12	150	150	100	26.10	11.20	11.40	15	55.00	60	95.00	12.00	16	65SB12150G
M12	200	200	100	26.10	11.20	11.40	15	55.00	60	145.00	12.00	16	65SB12200G
M16	100	100	Full Thread	31.90	14.60	14.80	20	70.00	70	30.00	16.00	21	65SB16100G
M16	150	150	100	31.90	14.60	14.80	20	70.00	70	80.00	16.00	21	65SB16150G

**Disclaimer:**

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

\* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024