

Nylon Frame Plug & Screw


Head Style: Hex Head

Material: Mild Steel

Class Grade: Low Tensile Class 4.6

Material Finish: Zinc Silver Plated

Corrosion Protection Level: Moderate

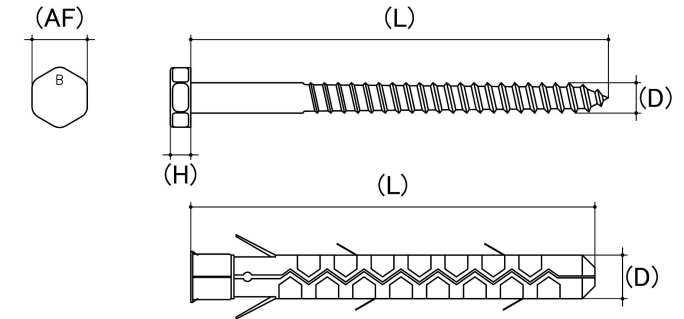

*CAD drawings shown for graphic representation only.**

Size	Screw & Plug Length (L) (mm)	Head Diameter (A) (mm)	Min Hole Dia On Fixture (mm)	Screw Effective Anchorage Depth (mm)	Drill Hole Depth (mm)	Drill Hole Size (mm)	Spanner Size (AS) (mm)	sku (qfind)
	Nom	Nom	Nom	Nom	Nom	Nom		
M10	85.00	13.00	10	70.00	80.00	10.00	13	65FA1080
M10	105.00	13.00	10	70.00	80.00	10.00	13	65FA10100
M10	125.00	13.00	10	70.00	80.00	10.00	13	65FA10120
M10	145.00	13.00	10	70.00	80.00	10.00	13	65FA10140
M10	165.00	13.00	10	70.00	80.00	10.00	13	65FA10160
M10	205.00	13.00	10	70.00	80.00	10.00	13	65FA10200
M10	285.00	13.00	10	70.00	80.00	10.00	13	65FA10280
M10	305.00	13.00	10	70.00	80.00	10.00	13	65FA10300

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024