

Large Flange Head Nutsert

Body Type: Round Open

Outside Body: Splined | Knurled


Thread Type: Metric - Coarse

Body Material: Stainless Steel

Class Grade: A2-70 G304

Finish: Stainless Steel A2-70 G304

Corrosion Protection Level: Excellent

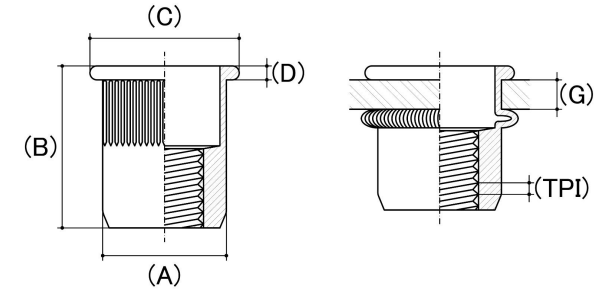

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (mm)	Thread Type	Material Grip Range (G) (mm)		Overall Nut Height (B) (mm)	Head Diameter (C) (mm)	Nut Width (A) (mm)	Flange Thickness (H) (mm)	Recommended Hole Size (mm)	Pull Out (KN)	Push Out (KN)	Torque To Turn (NM)	sku (qfind)
			Min	Max	Nom	Nom	Nom	Nom	Nom	Nom	Nom	Nom	
M3	0.50	Coarse	0.30	2.00	9.80	8.00	4.95	0.80	5.00	5	3	3	43LFS3SP
M4	0.70	Coarse	0.30	2.50	12.00	9.00	5.95	1.00	6.00	9	4	4	43LFS4SP
M4	0.70	Coarse	2.50	4.00	13.50	9.00	5.95	1.00	6.00	9	4	4	43LFS4SP2
M5	0.80	Coarse	0.30	3.00	13.00	10.00	6.95	1.00	7.00	15	6	8	43LFS5SP
M5	0.80	Coarse	3.00	4.50	14.50	10.00	6.95	1.00	7.00	15	6	8	43LFS5SP2
M6	1.00	Coarse	0.50	3.00	15.50	12.00	8.95	1.50	9.00	20	9	15	43LFS6SP
M6	1.00	Coarse	3.00	5.00	17.50	12.00	8.95	1.50	9.00	20	9	15	43LFS6SP2
M8	1.25	Coarse	0.50	3.00	17.50	15.00	10.95	1.50	11.00	29	12	29	43LFS8SP
M8	1.25	Coarse	3.00	5.50	20.00	15.00	10.95	1.50	11.00	29	12	29	43LFS8SP2
M10	1.50	Coarse	1.00	3.50	21.00	17.00	12.95	2.00	13.00	42	15	39	43LFS10SP
M10	1.50	Coarse	3.50	6.00	23.50	17.00	12.95	2.00	13.00	42	15	39	43LFS10SP2
M12	1.75	Coarse	1.00	4.00	25.20	22.00	15.95	2.00	16.00	-	-	-	43LFS12SP

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.