

Bremick MultiONE®

Head Style: Contour Head

Drive Type: Torx


Screw Point: Multi Purpose High Tech Drill Tip

Material: Hardened Steel

Class Grade: B8®

Finish: Revolution B8® Coating

Corrosion Protection Level: Ultimate

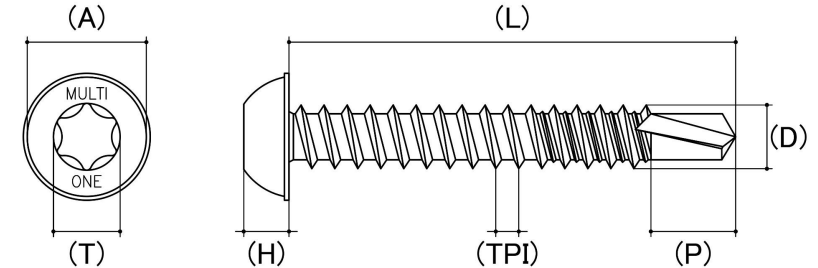

*Cad Drawings shown for graphic representation only.**

Size	Length (mm)	Product Diameter (D) (mm)		Head Diameter (A) (mm)	Head Height (H) (mm)	Drill Point Length (P) (mm)	Driver Bit Size (AS)	Driver Bit Included	sku (Part Number)
	Nom	Min	Max	Nom	Nom	Nom			
8g (4.20mm)	25.00	4.00	4.20	9.60	3.20	4.70	T25	Yes	05MCT825
8g (4.20mm)	30.00	4.00	4.20	9.60	3.20	4.70	T25	Yes	05MCT830
8g (4.20mm)	40.00	4.00	4.20	9.60	3.20	4.70	T25	Yes	05MCT840
10g (4.80mm)	30.00	4.65	4.80	10.90	4.00	4.70	T25	Yes	05MCT1030
10g (4.80mm)	40.00	4.65	4.80	10.90	4.00	4.70	T25	Yes	05MCT1040
10g (4.80mm)	50.00	4.65	4.80	10.90	4.00	4.70	T25	Yes	05MCT1050
10g (4.80mm)	65.00	4.65	4.80	10.90	4.00	4.70	T25	Yes	05MCT1065
12g (5.50mm)	60.00	5.30	5.40	14.15	4.50	4.70	T30	Yes	05MCT1260
12g (5.50mm)	75.00	5.30	5.40	14.15	4.50	4.70	T30	Yes	05MCT1275
12g (5.50mm)	100.00	5.30	5.40	14.15	4.50	4.70	T30	Yes	05MCT12100
14g (6.30mm)	65.00	6.20	6.40	14.15	4.70	5.30	T30	Yes	05MCT1465
14g (6.30mm)	75.00	6.20	6.40	14.15	4.70	5.30	T30	Yes	05MCT1475
14g (6.30mm)	100.00	6.20	6.40	14.15	4.70	5.30	T30	Yes	05MCT14100

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* Cad Drawings may not reflect diameter, thread length or overall length.