

Socket Allen Screw

Head Style: Button Head

Drive Type: Internal Hex


Thread Type: Metric - Coarse

Material: Stainless Steel

Class Grade: A2-70 G304

Corrosion Protection Level: Excellent

Standard: ISO 7380

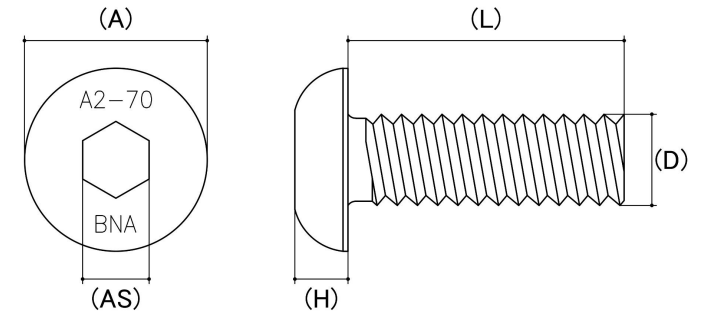

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (mm)	Thread Type	Product Diameter (D) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Driver Bit Size (AS) (mm)	sku (qfind)
			Min	Max	Min	Max	Min	Max	Nom	
M2	0.40	Coarse	1.88	1.98	3.20	3.50	1.10	1.30	1	31BS2
M2.5	0.45	Coarse	2.38	2.48	4.10	4.60	1.15	1.37	1	31BS25
M3	0.50	Coarse	2.87	2.98	5.40	5.70	1.40	1.65	2	31BS3
M4	0.70	Coarse	3.83	3.97	7.24	7.60	1.95	2.20	2	31BS4
M5	0.80	Coarse	4.82	5.00	9.14	9.50	2.50	2.75	3	31BS5
M6	1.00	Coarse	5.82	6.00	10.07	10.50	3.00	3.30	4	31BS6
M8	1.25	Coarse	7.78	8.00	13.57	14.00	4.10	4.40	5	31BS8
M10	1.50	Coarse	9.78	10.00	17.07	17.50	5.20	5.50	6	31BS10
M12	1.75	Coarse	11.73	12.00	20.48	21.00	6.24	6.60	8	31BS12
M16	2.00	Coarse	15.73	16.00	27.48	28.00	8.44	8.80	10	31BS16

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.