Socket Shoulder Screw


Head Style: Cap Head Drive Type: Internal Hex

Thread Type: UNC / BSW - Coarse Material: Alloy Steel Heat Treated Class Grade: High Tensile Grade 12.9

Finish: Plain Black Uncoated

Corrosion Protection Level: Poor

Standard: ISO 7379

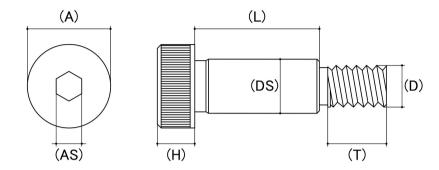

CAD drawings shown for graphic representation only.*

Size	Size x Pitch	Thread Pitch (TPI)		Shoulder Diameter (DS) (mm)		Head Diameter (A) (mm)		Head Height (H) (mm)		Thread Length Max T (inches)	Driver Bit Size (AS) (inches)	sku (afind)
				Min	Max	Min	Max	Min	Max	Nom	Nom	- (qfind)
1/4"	#10-24 (3/16") x 24 TPI UNC	24	Coarse	6.25	6.30	9.07	9.53	4.50	4.78	0.375	1/8	31SHC14P
5/16"	1/4" x 20 TPI UNC	20	Coarse	7.84	7.89	10.64	11.13	5.31	5.56	0.437	5/32	31SHC516P
3/8"	5/16" x 18 TPI UNC	18	Coarse	9.42	9.53	13.79	14.27	6.10	6.35	0.500	3/16	31SHC38P

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 19 Mar 2024