

Hand Tap


Product Type: Bottoming Tap

Thread Type: UNC / BSW - Coarse

Material: High Speed Steel

Standard: ISO529

Brand: Alpha

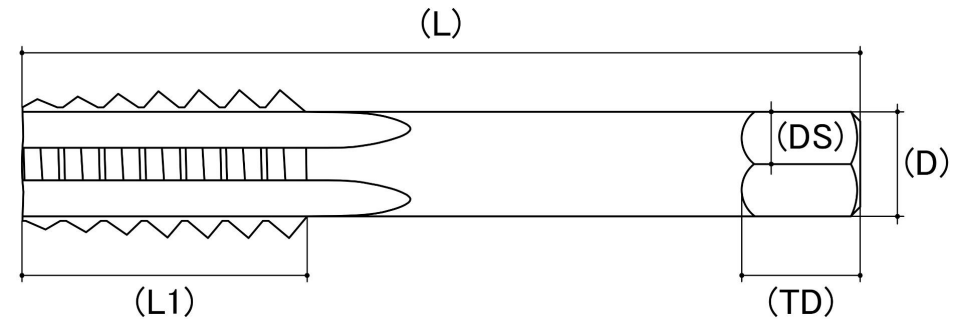

*CAD drawings shown for graphic representation only.**

Size	Thread Pitch (TPI)	Thread Type	Length (L) (mm)	Drive Square (DS) (mm)	Tapping Drill Size (mm)	sku (qfind)
			Nom	Nom	Nom	
#5-40	40	Coarse	40	2	2	14C540BA
#6-32	32	Coarse	50	3	2	14C632BA
#8-32	32	Coarse	53	3	3	14C832BA
#10-24 (3/16")	24	Coarse	58	4	3	14C1024BA
#12-24	24	Coarse	62	4	4	14C1224BA
1/4"	20	Coarse	66	4	5	14C14BA
5/16"	18	Coarse	72	4	6	14C516BA
3/8"	16	Coarse	80	5	8	14C38BA
7/16"	14	Coarse	85	6	9	14C716BA
1/2"	13	Coarse	89	7	10	14C12BA
9/16"	12	Coarse	95	9	12	14C916BA
5/8"	11	Coarse	102	9	13	14C58BA
3/4"	10	Coarse	112	11	16	14C34BA
7/8"	9	Coarse	118	14	19	14C78BA

Size	Thread Pitch (TPI)	Thread Type	Length (L) (mm)	Drive Square (DS) (mm)	Tapping Drill Size (mm)	sku (qfind)
			Nom	Nom	Nom	
1"	8	Coarse	130	14	22	14C1BA

Disclaimer:

Dimensional data and technical information was obtained from publically available sources and not acquired through standard agencies. It has been completed and compiled for reference purposes only; where discrepancies are found they are subject to change without notice. Bolt & Nut Australia makes no warranties or representations regarding the accuracy and validity of the compiled information and data. Contact the relevant standard authorities for accurate and detailed information.

* CAD drawings may not reflect diameter, thread length or overall length.

© Bolt & Nut Australia Pty Ltd. All rights reserved.

Version: 18 Mar 2024